

J4015 Double Balanced Mixer

4.0 to 15.0 GHz

Technical Characteristics




Product Features				Maximum Ratings		
Multi-octave bandwidth				Storage Temperature	-65 to +150°C	
Broad frequency - input and output				Operating Temperature Peak	-55 to +125°C	
Wide DC to IF frequency response				Peak Input Power For Any Single Port	+23dBm Peak	
Low conversion loss				Peak Input Power For Any Port	+26dBm peak	
High port-to-port isolation				Peak Input Current @ +25° C	100mA	
Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Conversion Loss						
RF Input	4.0 to 15.0		5.5	7.0	dB	IF output @ 2.0 GHz
LO Input	4.0 to 15.0					
IF Output	DC to 3.0					
Conversion Flatness						
Isolation						
LO-RF	4.0 to 15.0	25.0	35.0		dB	LO = 4.0 to 8.0 GHz
LO-IF	4.0 to 15.0	20.0	30.0		dB	
RF-IF			40.0		dB	
VSWR						
1dB Comp.Point J4015L J4015M J4015H			1.0 4.0 5.0		dBm dBm dBm	
LO Drive J4015L J4015M J4015H	4.0 to 15.0		7.0 4.0 5.0		dBm dBm dBm dBm	
Input TOIP J4015L J4015M J4015H			11.0 14.0 19.0		dBm dBm dBm	

NOTES:

1. Measured in a 50 ohm system with nominal LO drive and downconverter application only, unless otherwise specified. The I-port frequency range extends to DC for phase detection, pulse modulation, or attenuator applications. I-port VSWR degrades from a 50 Ω system at LO-IF frequencies.

2. Typical values are measured at +25°C and are not guaranteed.

Package outline L

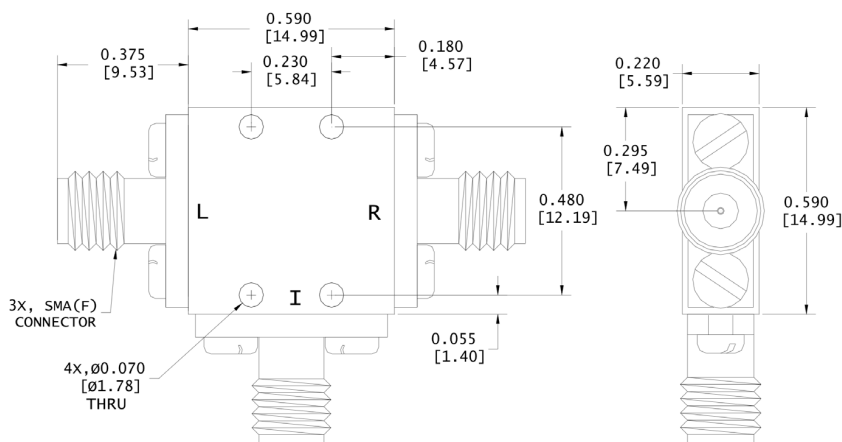

Product Export Classification

ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060



1

DISCLAIMER: Subject to change without notice.

6/26

Quality products that serve the industry. Today and tomorrow.

Copyright© EclipseMDI



www.eclipseMDI.com



1.408.526.1100

EclipseMDI


sales@eclipsemdi.com

J4015 Double Balanced Mixer


4.0 to 15.0

Outline Drawings 1 of 2


Coaxial Package outline 'B'

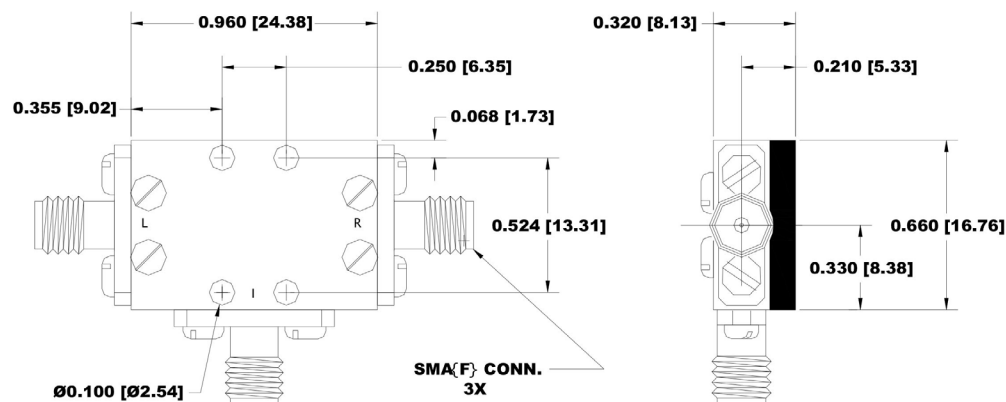

Coaxial Package outline 'L'

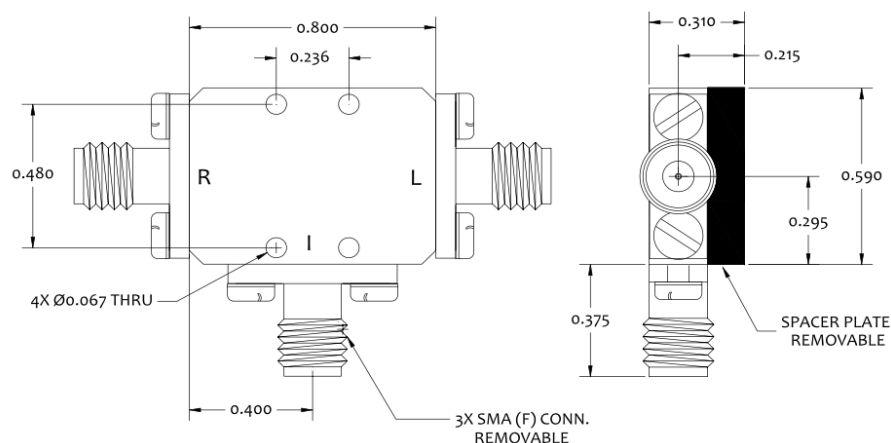

Coaxial Package outline 'C'

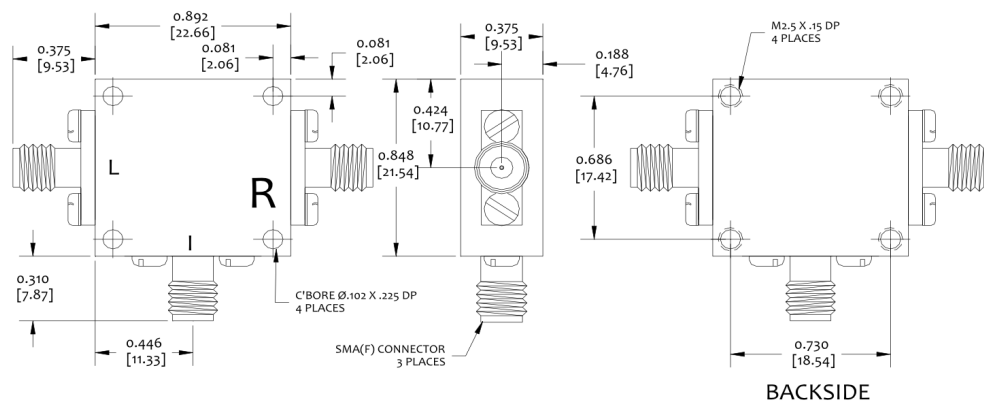


J4015 Double Balanced Mixer


4.0 to 15.0

Outline Drawings 2 of 2

Drop in Package outline 'E1'

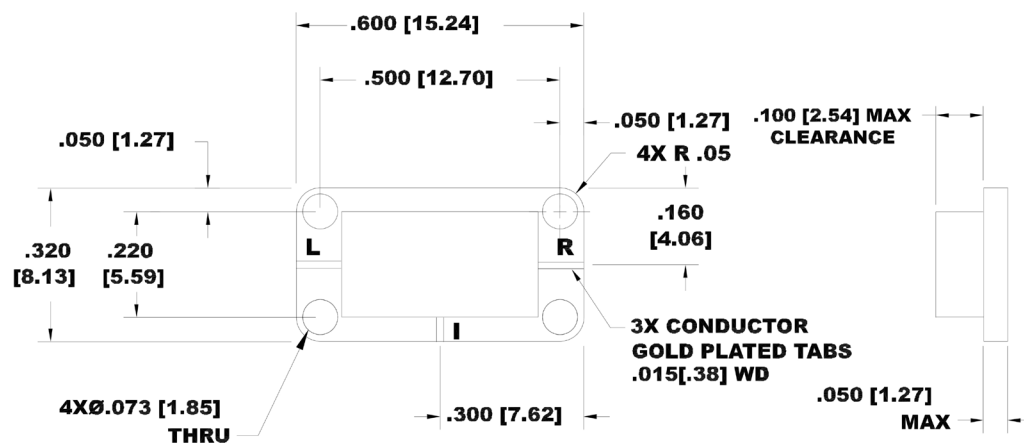

Drop in Package outline 'F1'

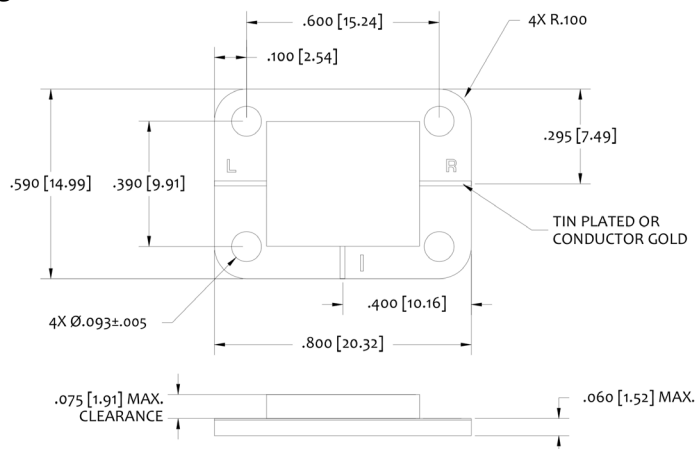

Drop in Package outline 'ZX'

