


EMD1211PA-816 Driver Amplifier Module

1 Watt Power Amplifier, 8-16 GHz



Technical Characteristics

Product Features

- 10.5 dB Gain @ 16 GHz
- +27.5 dBm Output Power @ 16 GHz
- +12V @ 300 mA Typical Supply Voltage
- Low Cost Connectorized Module


Product Description

EclipseMDI Products EMD1211PA-816 is an GaAs MMIC amplifier module operating from 8.0 to 16 GHz. This amplifier module is ideal for applications that requires a typical output of +27 dBm @ 16 GHz, while requiring only 300mA from a + 12 volt supply. Gain flatness of this device is typically ≤ 0.5 dB from 8.0 to 16.0 GHz. The EMD1211PA-816 comes in a small connectorized module ideal for commercial and industrial applications.


Electrical Specifications @ +25°C, Vdd=12V, Ids=300mA

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Gain	8.0		11.0		dB
	12.0		11.0		dB
	16.0		10.5		dB
Gain Flatness	8.0 to 16.0 GHz		± 0.10	± 0.5	dB
Gain Variation Over Temperature				0.005	dB/°C
Noise Figure			6.5		dB
Input Return Loss			14.0		dB
Output Return Loss			14.0		dB
1dB Compression Point	8.0		28.0		dBm
	12.0		27.5		dBm
	16.0		27.5		dBm
Saturated Output Power	8.0		30.0		dBm
	12.0		29.7		dBm
	16.0		28.0		dBm
3rd Order Intercept Point	8.0		38.0		dBm
	12.0		36.0		dBm
	16.0		35.0		dBm

Power performance

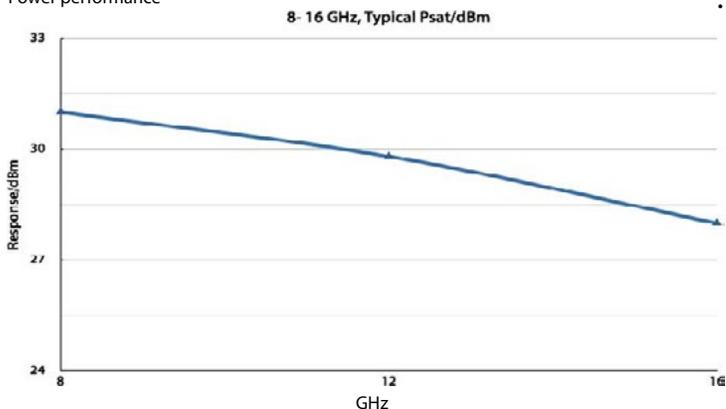

Mechanical Drawing

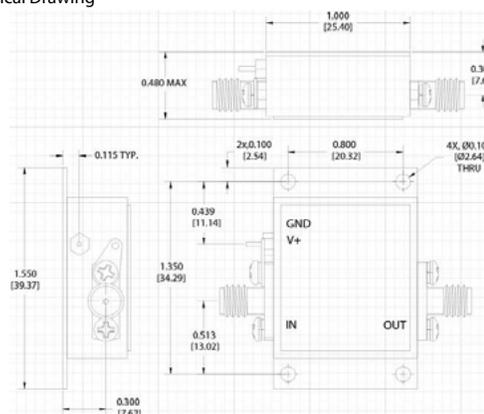

About EclipseMDI

ECLIPSE Microdevices is located in San Jose, California. ECLIPSE has been developing high performance analog semiconductors for use in wireless radio frequency (RF), microwave, and millimeter wave for commercial and industrial applications. ECLIPSE has formed a strategic alliances - with foundries that features leading state-of-the-art process technologies and with manufacturing facilities for high-volume production of innovative RFIC's.

Quality products that serve the industry. Today and tomorrow.

Copyright© EclipseMDI

www.eclipseMDI.com

1.408.526.1100

EclipseMDI