

# IR8596MF2/60-85 IR Mixer

8.5 to 9.6 GHz operation



Features
Broadband Frequency Operation
Excellent Conversion Loss
High port-to-port isolation
Frequency Converter Applications

Maximum Ratings	
Operating Temperature	-40 to +85°C
Storage Temperature	-65 to +150°C
Peak I/P Power For Any Port	+23 dBm Peak
Peak I/P Power For All Ports	+26 dBm Peak
Peak I/P Current @ +25°C	100mA


Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0000

Parameters	Freq. (GHz)	Minimum (dB)	Typical (dB)	Maximum (dB)	Units	Conditions
Conversion Loss						
RF Input	8.5 to 9.6		5.5	7.0	dB	
LO Input	N/A					
IF Output	.060 +/- .010					
VSWR	LO&IF RF			2.0:1		
Isolation						
L-R Isolation		20.0	30.0		dB	
L-IQ Isolation		N/A	N/A		dB	
RF-I/Q						
Spurious (In-band) 4IF						
Input IP3						
1dB Compression Point			N/A		dBm	
LO Drive				N/A	dBm	
Image Rejection		N/A	N/A		dB	
Amplitude Match			N/A			
Phase Match			N/A			

## NOTES:

1. Typical values are measured at +25°C and are not guaranteed.

Package Outline: F2

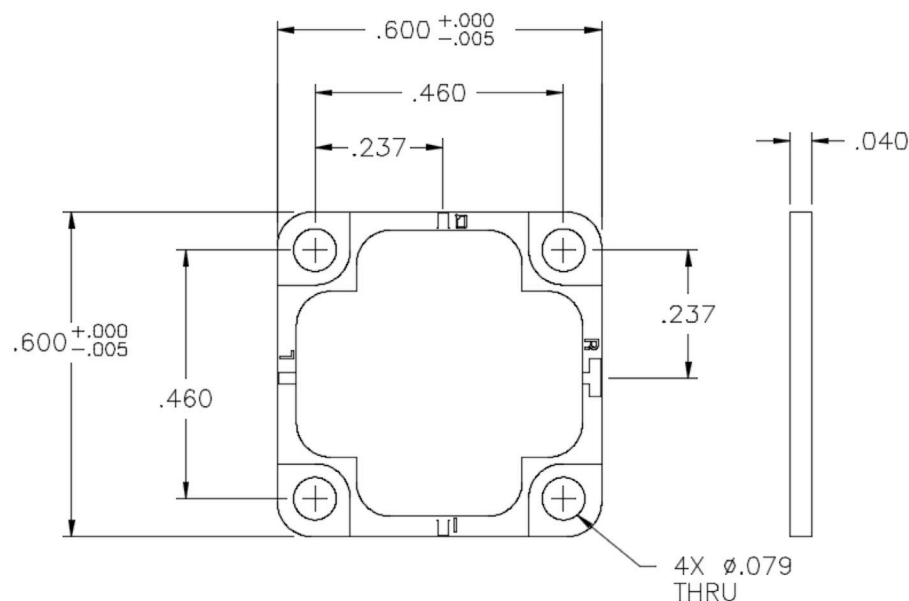

DISCLAIMER: Subject to change without notice. Rev(-) 09/5/19 1

Quality products that serve the industry. Today and tomorrow.

Copyright© EclipseMDI

www.eclipseMDI.com

1.408.526.1100

EclipseMDI

sales@eclipsemdi.com