## **EQN0618-06 Negative Slope Equalizer**

6.0 to 18.0 GHz





#### **Technical Characteristics**

Product Features
Fixed or adjustable attenuation tuning
Low insertion loss
SMA connector standard
Impedance 50 or 75 ohms
Compact size
Meets MIL-E-5400 and MIL-E-16400 environmental requirements

Maximum Ratings	
Max. Input Power	150mW
Operating Temperature	-55 to +95°C
Storage Temperature	-65 to +125°C
Specifications @	25°C


## **Maximum Ratings**

ECCN: EAR 99 (Unless otherwise specified)

HTS: 8543.7080.00

Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions	
Attenuation	6.0 to 18.0		6.0		dB		
Insertion Loss	18.0		1.5		dB		
VSWR	6.0 to 18.0		2.0:1				
Linearity	6.0 to 18.0		+/-1.0		dB		
Max. Input Power	6.0 to 18.0			150	mW		

### Package Outline: Q

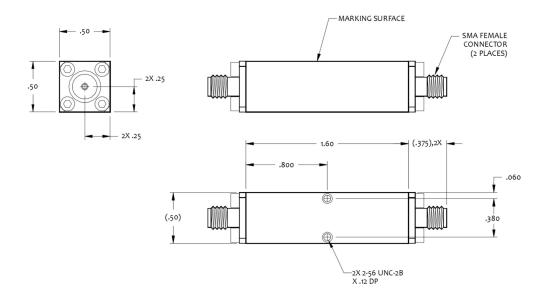

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

Quality products that serve the industry. Today and tomorrow.








# **EQN0618-06 Negative Slope Equalizer**

6.0 to 18.0 GHz



### **Test Data**

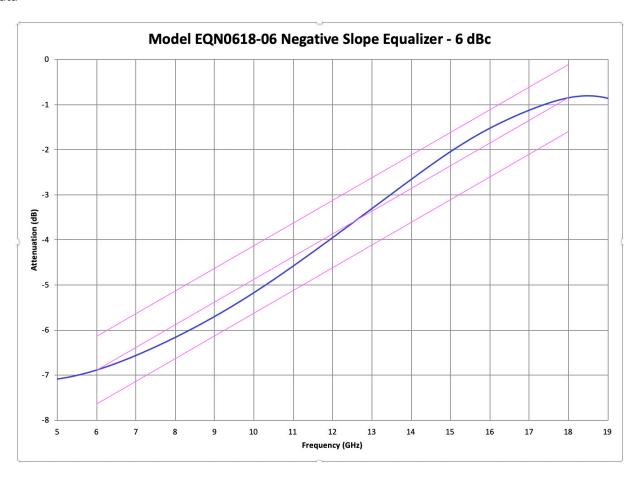

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

1.408.526.1100