EQN1226-06 Negative Slope Equalizer

12.0 to 26.5 GHz






Technical Characteristics

Product Features	Maximum Ratings			
Fixed or adjustable attenuation tuning	Max. Input Power	250mW		
Low insertion loss	Operating Temperature	-55 to +95°C		
SMA connector standard	Storage Temperature	-65 to +125°C		
Impedance 50 or 75 ohms	Specifications @	25°C		
Compact size Meets MIL-E-5400 and MIL-E-16400 environmental requirements	Maximum Ratings			
	ECCN: EAR 99 (Unless other	ECCN: EAR 99 (Unless otherwise specified)		
	HTS: 8543.7080.00			

	1						
Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions	
Attenuation	12.0 to 26.5		6.0		dB		
Insertion Loss	26.5		1.0		dB		
	12.0 + 26.5		1.0.1				
VSWR	12.0 to 26.5		1.8:1				
Linearity	12.0 to 26.5		+/-0.75		dB		
Max. Input Power	12.0 to 26.5			250	mW		

Package Outline: Q

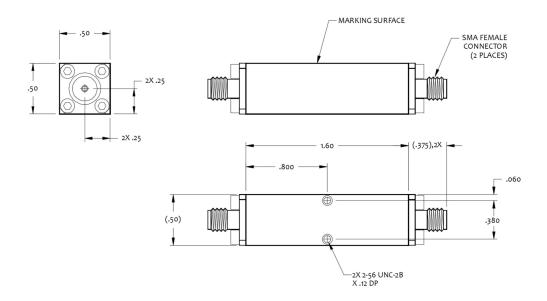

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19


Copyright© EclipseMDI

- www.eclipseMDI.com
- 1.408.526.1100

EQN1226-06 Negative Slope Equalizer



Test Data

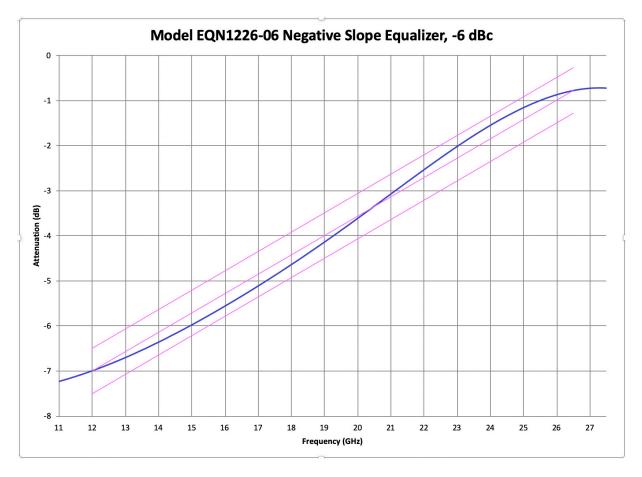

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

www.eclipseMDI.com

1.408.526.1100