## EQN1226-08 Negative Slope Equalizer

12.0 to 26.5 GHz





## **Technical Characteristics**


Product Features	Maximum Ratings
Fixed or adjustable attenuation tuning	Max. Input Power
Low insertion loss	Operating Temperature
SMA connector standard	Storage Temperature
Impedance 50 or 75 ohms	Specifications @
Compact size	Maximum Ratings
Meets MIL-E-5400 and MIL-E-16400 environmental requirements	ECCN: EAR 99 (Unless otherwise

Maximum Ratings	
Max. Input Power	250mW
Operating Temperature	-55 to +95°C
Storage Temperature	-65 to +125°C
Specifications @	25°C
Maximum Ratings	

ECCN: EAR 99 (Unless otherwise specified) HTS: 8543.7080.00

Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Attenuation	12.0 to 26.5		8.0		dB	
Insertion Loss	26.5		1.3		dB	
VSWR	12.0 to 26.5		1.8:1			
Linearity	12.0 to 26.5		+/-0.3		dB	
Max. Input Power	12.0 to 26.5			250	mW	

Package Outline: Q

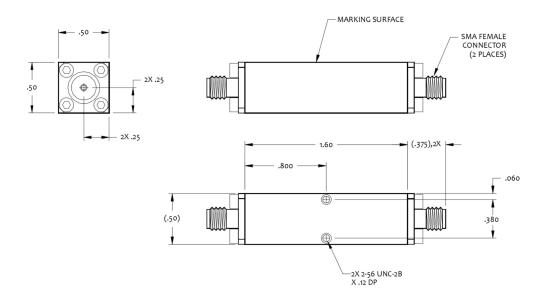

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19


Copyright© EclipseMDI

- www.eclipseMDI.com
- 1.408.526.1100

## EQN1226-08 Negative Slope Equalizer



Test Data

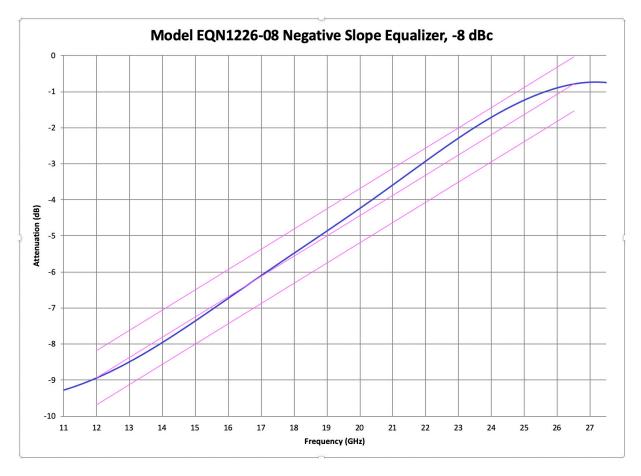

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

Copyright© EclipseMDI

www.eclipseMDI.com

1.408.526.1100