# **ESL0510A2 Pin-Schottky Diode Limiter**

0.5-1.0 GHz Octave Band





#### **Technical Characteristics**

### **Product Features**

Power Handling: 1 watt CW, 100W peak power

(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)

Internal DC block

Fast recovery time - 200 uSec typ.

Limiting threshold above +4dBm typ. & low typical output leakage

Low insertion loss

### **Maximum Ratings**

Storage Temperature65° to +125°C
Operating Temperature55° to +90°C
Max Input Power+2 watts CW, 100 watts peak

## **Product Export Classification**

ECCN: EAR 99 (unless otherwise specified)


HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

# **Electrical Specifications**

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	0.5 to 1.0		0.5		dB
VSWR	0.5 to 1.0		1.5:1		-
Leakage Power (CW)	0.5 to 1.0			+18	dBm CW
				+20	dBm Peak
Operating Temperature		-55		+90	° C

## Outline drawing

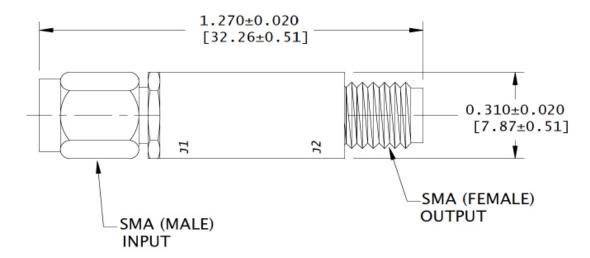

#### Notes:

- 1. Limiter has an internal DC block.
- 2. Typical values are measured at +25°C and are not guaranteed.

Quality products that serve the industry. Today and tomorrow.



