

A6018ML Triple Balanced Mixer

6.0 to 18.0 GHz

Technical Characteristics

Product Features
Multi-octave bandwidth
Broad frequency - input and output
Wide DC to IF frequency response
Low conversion loss
High port-to-port isolation

Maximum Ratings	
Storage Temperature	-65 to +150°C
Operating Temperature Peak	-55 to +125°C
Peak Input Power For Any Port	+24dBm Peak
Specifications @	25°C


Parameters	Freq. (GHz)	Minimum	Typical	Maximum	Units	Conditions
Conversion Loss						
RF Input	6.0 to 18.0		6.5	8	dB	IF = 2000 to 4000 MHz
LO Input	6.0 to 18.0					
IF Output	2.0 to 8.0					
Isolation						
LO-RF		20	27		dB	
LO-IF		20	27		dB	
RF-IF		20	25		dB	
VSWR			2.5:1			
1dB Comp.Point						
LO Drive A6018M			11	14	dBm	
3rd Order Intercept Point A6018M			14		dBm	

NOTES:

1. Measured in a 50-ohm system with nominal LO drive and downconverter application only, unless otherwise specified. The I-Port frequency range extends to DC for phase detection, pulse modulation, or attenuator applications. I-Port VSWR degrades from a 50-ohm system at low IF frequencies.

2. Typical values are measured at +25°C and are not guaranteed.

Package outline "L"

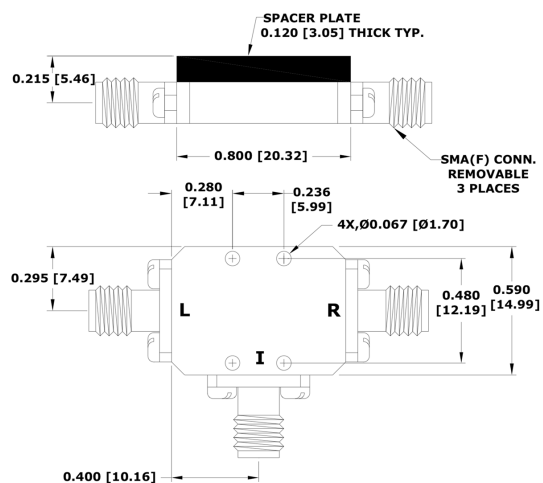

DISCLAIMER: Subject to change without notice.

Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060

