

EPL2040A3 Pin-Pin Diode Limiter

2.0-4.0 GHz Octave Band



Technical Characteristics

Product Features

Power Handling: 1 watt CW, 100W peak power
(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)
Internal DC return
Fast recovery time
Limiting threshold above +12dBm typ. & below typical output leakage
Low insertion loss

Maximum Ratings


Storage Temperature.....	-65° to +125°C
Operating Temperature.....	-55° to +90°C
Max Input Power.....	+2 watts CW, 100 watts peak

Specifications @ +25°C & -10 dBm input power.

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	2.0 to 4.0		0.8		dB
VSWR	2.0 to 4.0		1.5:1		-
Leakage Power (CW)	2.0 to 4.0			+18.5	dBm CW
				+23	dBm Peak
Operating Temperature		-55		+90	° C

Outline drawing

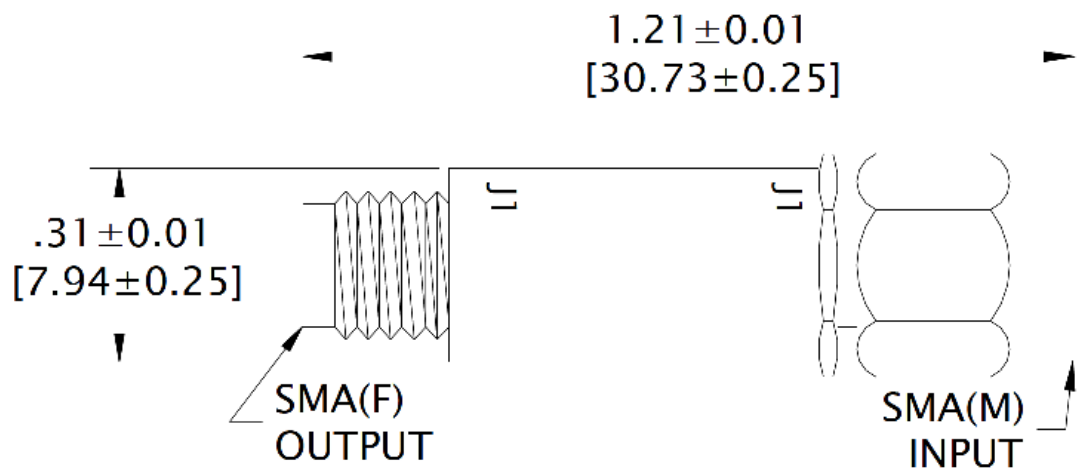

Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060



- Notes:
- 1. Limiter has an internal DC return.
 - 2. Typical values are measured at +25°C and are not guaranteed.