

EPL8016A3 Pin-Pin Diode Limiter

8.0-16.0 GHz Octave Band



Technical Characteristics

Product Features
Power Handling: 1 watt CW, 100W peak power
(1 usec Pulse Width, 0.1% Duty Cycle Derated to 20% @ +125 °C)
Internal DC return
Fast recovery time
Limiting threshold above +12dBm typ. & below typical output leakage
Low insertion loss

Maximum Ratings
Storage Temperature.....-65° to +125°C
Operating Temperature.....-55° to +90°C
Max Input Power.....+2 watts CW, 100 watts peak


Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 85543.70.8000

Specifications @ +25°C & -10 dBm input power.

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Insertion Loss	8.0 to 16.0		2.0		dB
VSWR	8.0 to 16.0		2.0:1		-
Leakage Power (CW)	8.0 to 16.0			+18	dBm CW
				+20	dBm Peak
Operating Temperature		-55		+90	° C

Outline drawing

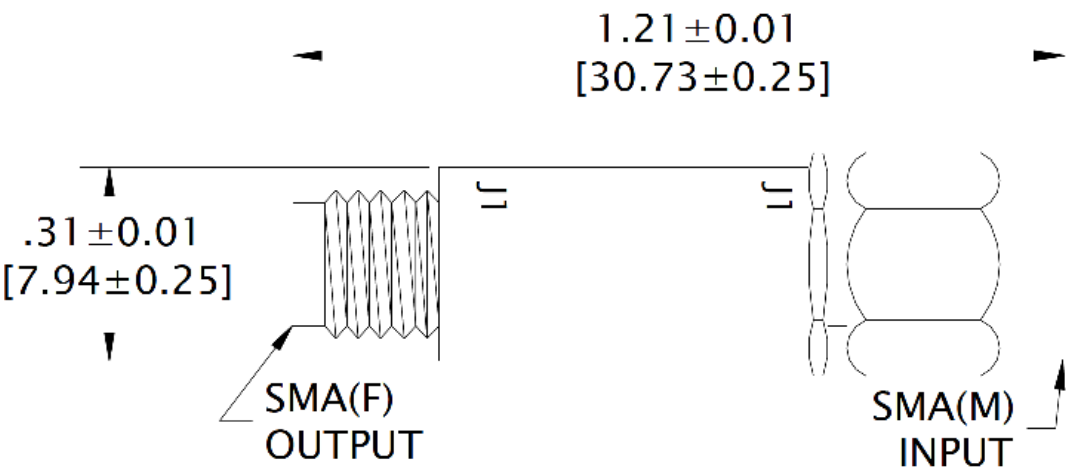

- Notes:
- 1. Limiter has an internal DC return.
 - 2. Typical values are measured at +25°C and are not guaranteed.

Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060

