

EZM0120NC Zero Bias Schottky Detector

N-BNC Interface Negative Output Polarity
0.01 to 2.0 GHz



NOTES:
Specifications @ +25°C & -20dBm input power

Technical Characteristics

Product Features
No Bias Required
Neg. (-) Polarity
Broadband Flat Frequency Response
Excellent VSWR


Max. Ratings	
Storage Temperature:	-65° to +100°C
Operating Temperature:	-54° to +100°C
Maximum input power:	100mW CW

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	0.01 to 2.0	450	500		mV/mW open circuit
Voltage Sensitivity Stability over Temperature	0.01 to 2.0		3	3.5	dB
VSWR	0.01 to 2.0		1.18:1	1.20:1	
Flatness	0.01 to 2.0		+/-0.08	+/-0.10	dB
Polarity			Neg.(-)		
Video Capacitance			470		pF
Risetime & Falltime @ +10 dBm					
Dynamic Range	0.01 to 2.0	-30		20	dBm
CW Power Handling				100	mW
Tss					
Operating Temperature		-54		100	°C

- NOTES:
- 1. Standard polarity is negative. For positive polarity, add a 'P', ex. EZM0120PNC
 - 2. Typical values are measured at +25°C and are not guaranteed

Outline Drawing

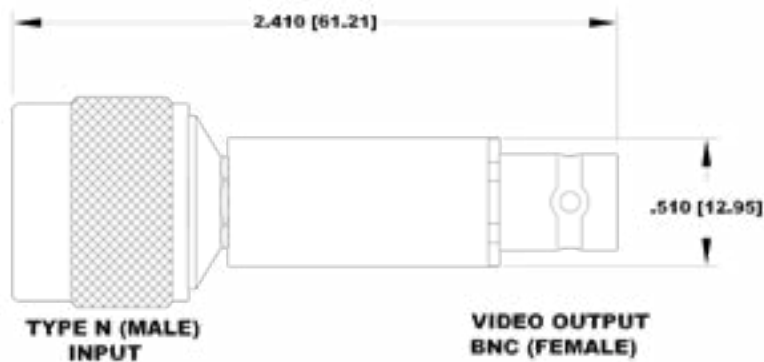

Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060



EZM0120NC Zero Bias Schottky Detector

N-BNC Interface Negative Output Polarity

0.01 to 2.0 GHz



Transfer Curve

