


EZR0112QFN4 ZBD Schottky Detector

0.1-12.0 GHz Power Monitor, High Sensitivity

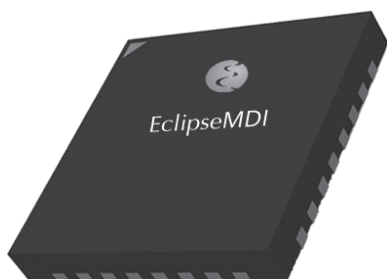

Technical Characteristics

Product Features

- No bias required
- Neg. (-) Polarity
- Broadband Flat Frequency Response
- Excellent VSWR
- Low Cost QFN 4mm leadless RoHS package

Max. Ratings



Storage Temperature:	-65° to +100°C
Operating Temperature:	-54° to +100°C
Maximum input power:	+27dBm peak, +20dBm CW
Specifications	@ +25° & -20 dBm Input Power

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	0.5 to 12.0	1600	1800		mV/mW open circuit
Voltage Sensitivity Stability over Temperature	0.5 to 12.0	2.5	3	3.5	dB
VSWR	0.5 to 12.0			3.5:1	
Flatness	0.5 to 12.0		0.8	1	dB
Polarity			Neg. (-)		eV
Video Capacitance		10	20		pF (Note 3)
Dynamic Range	0.5 to 12.0	-30		20	dBm
Tss			-50		dBm (Note 1)

NOTES:

1. Tss is measured with a 2MHz bandwidth and a 3dB NF video amplifier.
2. Pins 4&5 – RF Input, Pins 15&16 – Video Output
3. Typical values are measured at +25°C and are not guaranteed.
4. An external bypass (100pf) capacitor is required for operation to minimize RF feedthru.
5. Negative output polarity is standard, Add "P" to the end of the model number for Positive, Ex: EZR0112PQFN4

Package Pinout

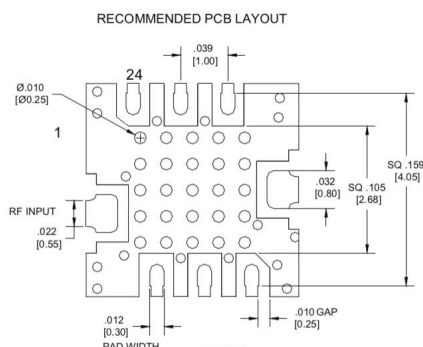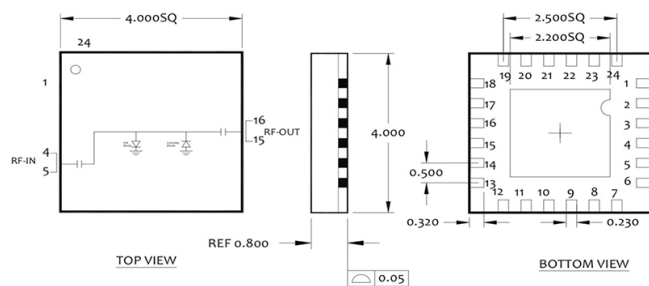

- NOTES:
1. MATERIAL: ROGERS 4350, 10 MIL THICK
2. DIMENSIONS ARE IN INCHES[MM]

Product Export
Classification
ECCN: EAR 99 (NLR)
HTS: 8542.33.0001



Data Plots

EZR series Transfer Curve

