

MBD4057-H20 Planar Tunnel Diode



Technical Characteristics

Product Features

Rugged Germanium Planar Construction
Excellent Temperature Stability
No DC Bias Required
Wide Video Bandwidth


Product Description

EclipseMDI MBD4057-H20, is a zero-bias, rugged Planar Tunnel Diode constructed with Germanium Planar. This tunnel diode exhibits excellent temperature stability, wide video bandwidth. The MBD4057 is also available in non-hermetic (H20X) ceramic packages.

Maximum Ratings


Storage Temperature.....	-65° to +125°C
Operating Temperature.....	-65° to +110°C
Input Power Handling.....	+17dBm CW or 3 ERG spike
Soldering Temperature.....	+160° C

H20
[HERMETIC]

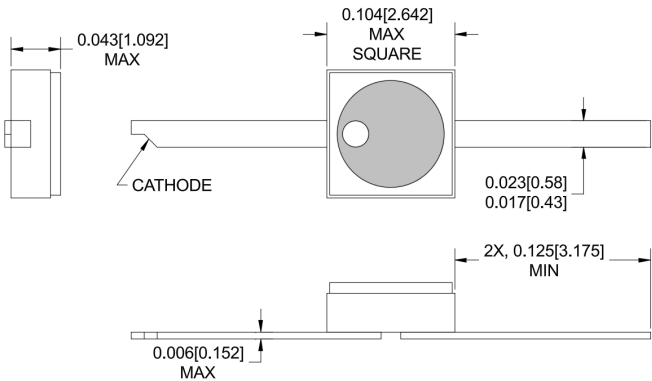


Parameters	Specifications				
	Conditions	MIN	Typical	MAX	UNITS
I _p		400		500	μA
C _j	V _r =V _v , f=100MHz			.30	pF
K[Y]	Pin=-20dBm R _L (Load)=10K, f=10GHz		275		mV/mW
R _v			65		Ω Ohms
I _p /I _v		2.5			
V _r	I _f =500μA		400		mV
V _f	I _f =3mA			120	mV

Diode equivalent circuit

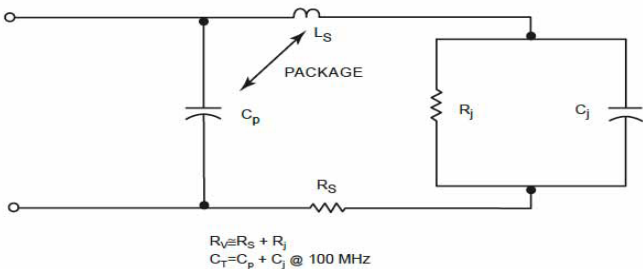

Back diode parameters

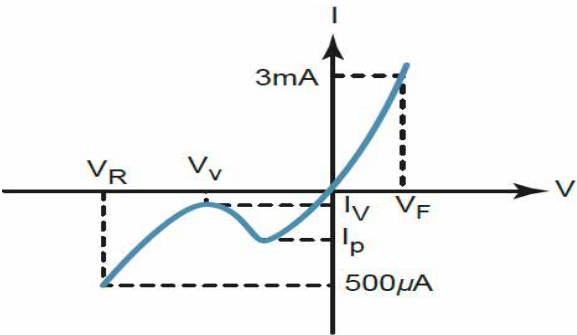

Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060

About EclipseMDI

ECLIPSE Microdevices is located in San Jose, California. ECLIPSE has been developing high performance analog semiconductors for use in wireless radio frequency (RF), microwave, and millimeter wave for commercial and industrial applications. ECLIPSE has formed a strategic alliances - with foundries that features leading state-of-the-art process technologies and with manufacturing facilities for high-volume production of innovative RFIC's.

