



EQN Negative Slope Microwave Equalizer Family

Package Outline 'R'

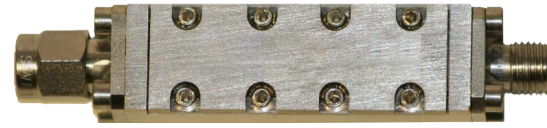


Product image not actual size

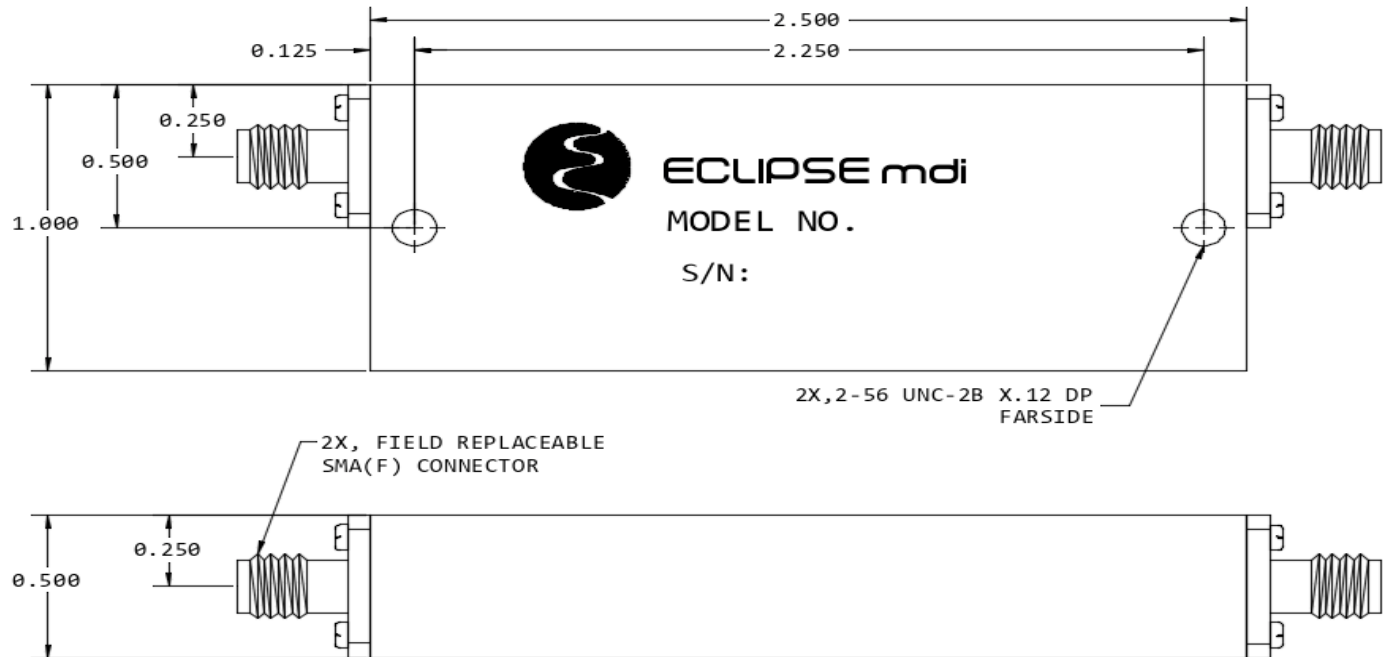

Part Number	Freq. (GHz)	Attenuation (dB) nom.	Ins. Loss (dB) typ.	VSWR max.	Linearity (dB) max.	Max Input Power (mW)
EQN0102-03	1.0-2.0	3.0	0.5	1.5:1	+/-0.5	150
EQN0102-06	1.0-2.0	6.0	0.5	1.5:1	+/-0.5	150
EQN0102-10	1.0-2.0	10.0	1.0	1.5:1	+/-1.0	150
EQN0104-03	1.0 to 4.0	3.0	0.8	1.8:1	+/-0.5	150
EQN0104-04	1.0 to 4.0	4.0	0.8	1.8:1	+/-0.5	150
EQN0104-06	1.0 to 4.0	6.0	1.0	1.8:1	+/-0.8	150
EQN0104-08	1.0 to 4.0	8.0	1.0	1.8:1	+/-1.0	150
EQN0204-03	2.0 to 4.0	3.0	0.5	1.5:1	+/-0.25	150
EQN0204-06	2.0 to 4.0	6.0	0.8	1.5:1	+/-0.5	150
EQN0204-10	2.0 to 4.0	10.0	1.0	1.5:1	+/-1.0	150
EQN0206-04	2.0 to 6.0	4.0	0.8	1.8:1	+/-0.5	150
EQN0206-06	2.0 to 6.0	6.0	0.8	1.8:1	+/-0.5	150
EQN0206-08	2.0 to 6.0	8.0	0.8	1.8:1	+/-0.5	150
EQN0206-09	2.0 to 6.0	9.0	1.0	1.8:1	+/-0.5	150
EQN0206-23	2.0 to 6.0	23.0	1.0	1.8:1	+/-1.5	150
EQN0208-06	2.0 to 8.0	6.0	0.8	1.8:1	+/-0.5	150
EQN0208-10	2.0 to 8.0	10.0	1.0	1.8:1	+/-1.0	250
EQN0208-16	2.0 to 8.0	16.0	1.5	1.8:1	+/-1.5	150

Typical Performance Plots Attenuation

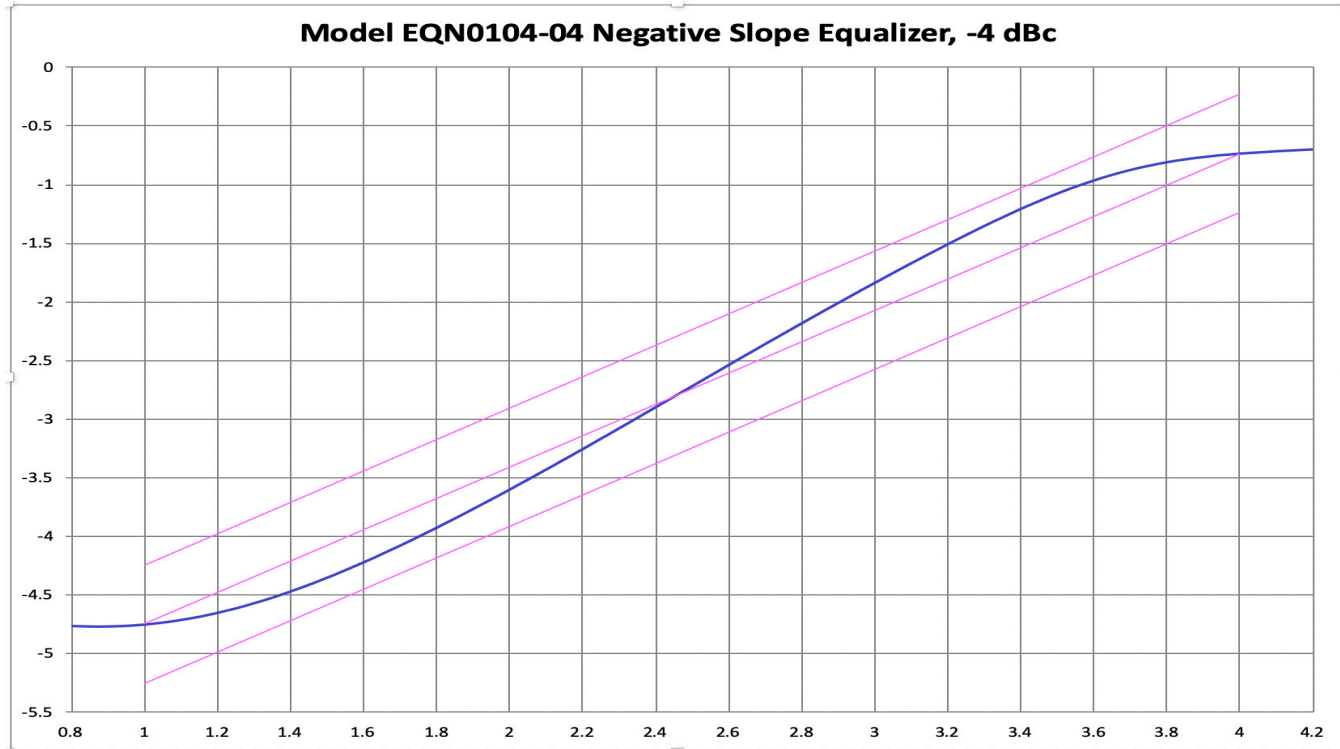EQN0104-04

EQN0104-08
