EQN1826-06 Negative Slope Equalizer

18.0 to 26.5 GHz






Technical Characteristics

Product Features	Maximum Ratings	
Fixed or adjustable attenuation tuning	Max. Input Power	150mW
Low insertion loss	Operating Temperature	-55 to +95°C
SMA connector standard	Storage Temperature	-65 to +125°C
Impedance 50 or 75 ohms	Specifications @	25°C
Compact size	Maximum Ratings	
Meets MIL-E-5400 and MIL-E-16400 environmental requirements	ECCN: EAR 99 (Unless otherwise specified)	

Typical **Parameters** Minimum Maximum Units Conditions Freq. (GHz) 18.0 to 26.5 6.0 dB Attenuation Insertion Loss 1.5 dB 26.5 VSWR 18.0 to 26.5 2.0:1 18.0 to 26.5 +/-0.75 dB Linearity Max. Input Power 18.0 to 26.5 150 mW

HTS: 8543.7080.00

Package Outline: Q

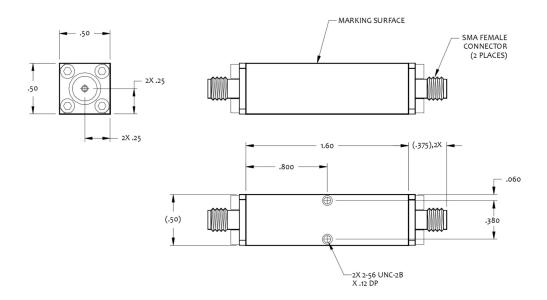

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19


Copyright© EclipseMDI

- www.eclipseMDI.com
- 1.408.526.1100

EQN1826-06 Negative Slope Equalizer 18.0 to 26.5 GHz



Test Data

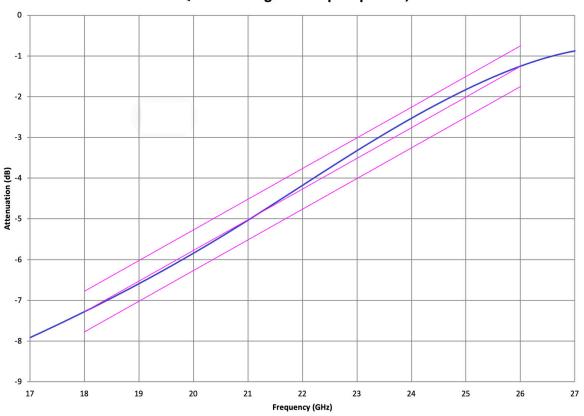

Model EQ1826-06 Negative Slope Equalizer, -6 dBc

DISCLAIMER: Subject to change without notice. Rev(B) 09/12/19

Copyright© EclipseMDI

1.408.526.1100