

# DT0112A3 Tunnel Diode Detector

0.1 to 12.4 GHz Negative Polarity, SMA Connector, Bias Detector with 50Ω SMA Male to SMA Female  
 Female Video Out Operating from 0.1 to 12.4 GHz



"A3" pkg. P/N DT0112A3



PRODUCT FEATURES	
No bias required	
Extremely low video output resistance (125 Ω typ)	
Extremely fast pulse response (5 nsec risetime typ)	
Excellent frequency response	
Excellent dynamic range & loaded voltage output sensitivity	
Negative Polarity is Standard	
High Reliability Hermetically Sealed Coax	
RoHS Compliant	

CONFIGURATION	
Bias Type	No Bias
Detector Polarity, Note 3	Negative [-]
Body Style	Coaxial
RF Input Connector	SMA [Male]
RF Input Impedance	50 Ω
Video Output Connector	SMA [Female]
Detector Type	Broadband


**NOTES:**

1. TSS is measured with a video amplifier having at least 50dB gain, <3dB NF and 2 MHz video bandwidth.
2. Typical values are measured at +25°C and are not guaranteed.
3. Negative output polarity is standard. Add P to the end of the model number for positive polarity, ex. DT0112PA3 Pos(+)
4. To select a package, refer to pg. 2 and insert package name, ex. NB. Order P/N D0112NB (polarity + or -)

ELECTRICAL SPECIFICATIONS	
Frequency Range [GHz]	0.1 to 12.4
Voltage Sensitivity [mV/mW], typ.	450
Tss [dB], Note 1, typ.	-50
VSWR, typ.	2.5:1
Flatness [±dB], typ.	1
Video Cap [pF], typ.	470

MAXIMUM RATINGS	
Max. Input Power [dBm]	17
Storage Temperature [deg. °]	-65° to +125 ° C
Operating Temperature [deg. °]	-65° to +115 ° C
Specifications @ [° C]	25

**A3 Outline Drawing**

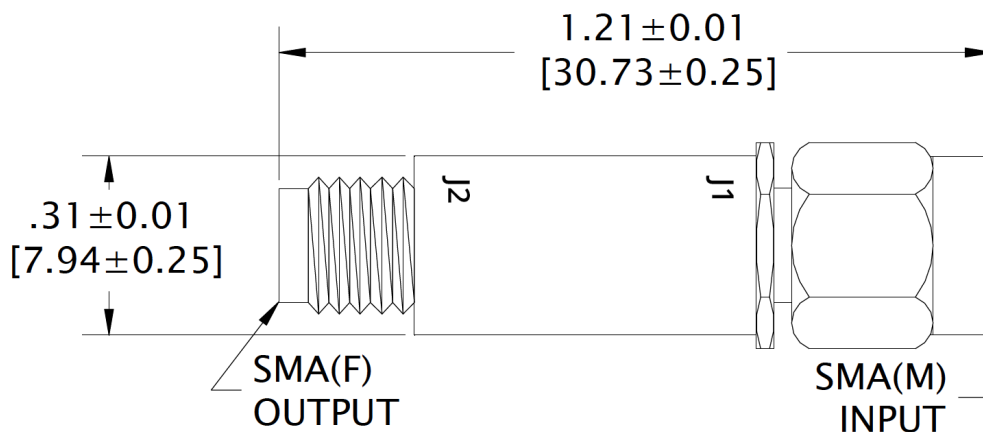

**About EclipseMDI**

ECLIPSE Microdevices is located in San Jose, California. ECLIPSE has been developing high performance analog semiconductors for use in wireless radio frequency (RF), microwave, and millimeter wave for commercial and industrial applications. ECLIPSE has formed a strategic alliances - with foundries that features leading state-of-the-art process technologies and with manufacturing facilities for high-volume production of innovative RFIC's.

**Product Export Classification**  
 ECCN: EAR 99 (unless otherwise specified)  
 HTS: 8541.10.0060




# DT0112A3 Tunnel Diode Detector

0.1 to 12.4 GHz Negative Polarity, SMA Connector, Bias Detector with 50Ω SMA Male to SMA Female  
Female Video Out Operating from 0.1 to 12.4 GHz




## Outline Drawings

NB

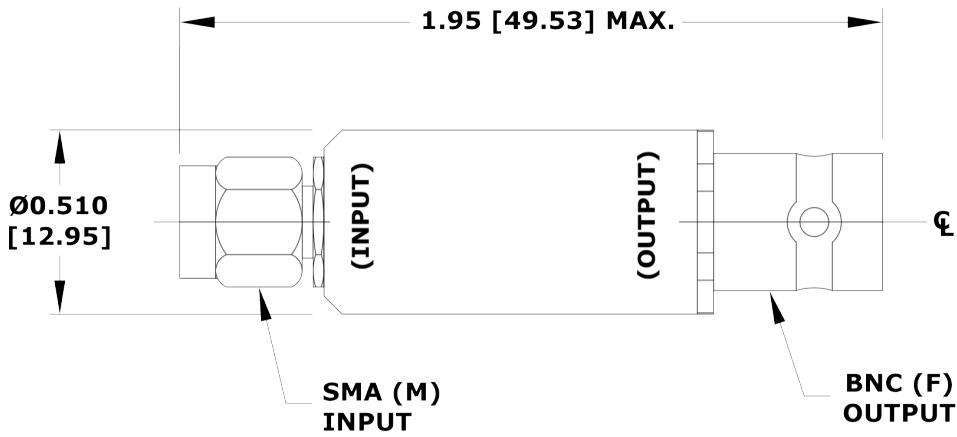

NC

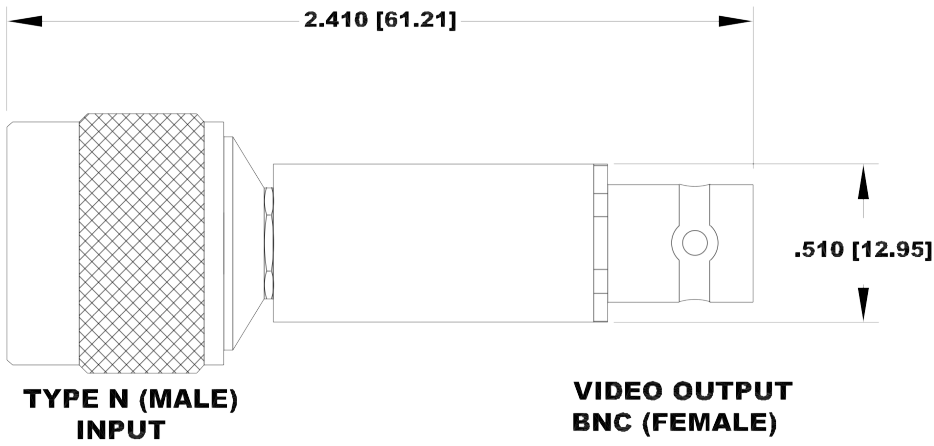

N

