

EZR1315A3 Zero Bias Schottky Detector

13.0 to 15.0 GHz SMA-F/SMA-M Negative Output Polarity



NOTES:
Specifications @ +25°C & -20dBm input power

Technical Characteristics

Product Features

High Voltage Output Sensitivity
No bias required
Neg. (-) Polarity
Broadband Flat Frequency Response

Max. Ratings


Storage Temperature:	-65° to +150°C
Operating Temperature:	0° to +90°C
Maximum input power:	100mW CW

Electrical Specifications

Parameters	Freq. (GHz)	Min.	Typical	Max.	Units
Voltage Sensitivity	13.0 to 15.0	1000	1200		mV/mW open circuit
Voltage Sensitivity Stability over Temperature					
VSWR					
Flatness	13.0 to 15.0			0.25	dB
Video Capacitance			5	10	pF
Risetime & Falltime @ +10 dBm					
Dynamic Range					
CW Power Handling				100	mW
Tss					
Operating Temperature		0		90	°C

- NOTES:
- Standard polarity is negative. For positive polarity, add a 'P', ex. EZR1315PA3
 - Typical values are measured at +25°C and are not guaranteed.

Outline Drawing

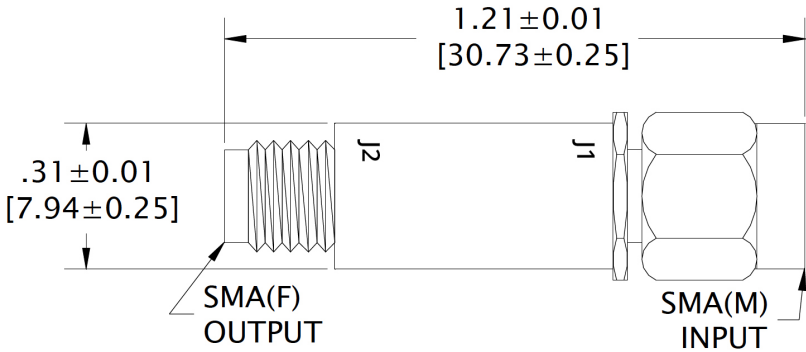

Product Export Classification
ECCN: EAR 99 (unless otherwise specified)
HTS: 8541.10.0060



06/26